

07/31/00
JC603 U.S. PRO

EVENSON, McKEOWN, EDWARDS & LENAHA, P.L.L.C.
1200 G Street, N.W., Suite 700
Washington, D.C. 20005
(202) 628-8800

JC639 U.S. PRO
09/629186
07/31/00

July 31, 2000

Box PATENT APPLICATION

Assistant Commissioner for Patents Re: New U.S. Patent Appln.
Washington, D.C. 20231 Our Ref: 852/49038

Sir:

Transmitted herewith for filing is the patent application of:

Ekkehard KÖRNER and Rainer GÜTHLE

entitled: **PRESS PRODUCTION SERIES WITH OFFSET DRIVE**

Enclosed are:

1. Specification, including 5 claims (pages 1-10, plus specification title page).
2. 3 Sheets of X Formal Drawings showing Figs. 1-4.
3. Declaration and Power of Attorney (**unexecuted**).
4. Priority is being claimed under 35 U.S.C. §119 and 37 C.F.R. §1.55 based on Priority Document 199 35 655.6 filed in Germany on July 29, 1999.


5. The filing fee has been calculated as shown below:

Basic Fee					\$345/690 = \$690.00
Total Claims	<u>5</u>	-	20	=	<u>0</u> x \$ 9/ 18 = \$
Independent Claims	<u>2</u>	-	3	=	<u>0</u> x \$ 39/ 78 = \$
Multiple Dependent Claims Presented					\$130/260 = \$

Total Filing Fee \$690.00

The filing fee is being deferred at this time.

Respectfully submitted,


James F. McKeown
Reg. No. 25,406

JFM:sbh

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

SPECIFICATION

INVENTION: **PRESS PRODUCTION SERIES WITH OFFSET DRIVE**

INVENTOR: **Ekkehard KÖRNER**
Citizenship: German
Residence/ David Späth Weg 32
Post Office Address D-73035 Göppingen
GERMANY

INVENTOR: **Rainer GÜTHLE**
Citizenship: German
Residence/ Kronengässle 1/1
Post Office Address D-73061 Ebersbach/Weiler
GERMANY

ATTORNEYS: **EVENSON, McKEOWN, EDWARDS & LENAHAAN, P.L.L.C.**
Suite 700
1200 G Street, N.W.
Washington, D.C. 20005
Telephone No.: (202) 628-8800
Facsimile No.: (202) 628-8844

PRESS PRODUCTION SERIES WITH OFFSET DRIVE

CROSS-REFERENCE TO RELATED APPLICATIONS:

5 This application is related to two other applications entitled (1) Press with Ejector Device for Different Ejector Strokes, whose inventors are Ekkehard Körner and Martin Döringer, Serial No. (not yet assigned), Attorney Docket No. 852/49037, and (2) Press Poduct Line, whose inventors are Ekkehard Körner and Martin Döringer, Serial No. (not yet assigned), Attorney Docket No. 852/49039.

BACKGROUND OF THE INVENTION

10 This application claims the priority of 199 35 655.6, filed on July 29, 1999, the disclosure of which is expressly incorporated by reference herein.

15 The present invention concerns a press which is a member of a press production series and has production series, particularly for massive forming, with a machine frame, with a ram which is guided journalled and disposed for attachment of a first tool component, with a ram drive which is positioned on the machine frame and presets a path-time trace of the ram and which comprises at least one electric motor and at least one eccentric shaft connected to
20 one another via a drive means, and with a table which is positioned opposite to the ram on the machine body and is disposed for attachment of a second tool component.

Mechanical presses having varying stroke speeds corresponding to the task for which they are used are often utilized, particularly for massive forming. In addition, depending on the operating conditions, varying path-time curves of the ram motion may be desired.

A toggle drive or another type of lever drive connecting a continuously rotating eccentric with the ram is often used in this type of press as a mechanical ram drive. The eccentric shaft is connected with the drive motor via a step-down gear with so that the speeds match. Various path-time traces and stroke speeds can be attained with different drive configurations. This represents a significant expense in manufacturing technology.

A mechanical press with a crank-toggle drive is known from DE 2127289 which has two eccentrics positioned at fixed offset angles to one another and two separate connecting rods. The eccentric shaft is connected with a cogwheel which meshes with the pinion of a drive motor. The press does not provide, however, for changing gear ratios.

SUMMARY OF THE INVENTION

An object of the present invention is to reduce the expenditure for the production of presses with varying stroke speeds.

According to the invention, various presses are combined into a press production series, within which the presses only vary in regard to the configuration of their ram drives. These include a step-down gear and a gear to transform rotational motion into linear motion. The ram drives are preferably driven from drives which are uniform within the press production series, e.g., in the form of uniform clutch-brake combinations. This is made possible by providing that all presses in the series do not exceed a given maximum eccentric torque. This becomes possible when the gradient of the path-time traces of the ram motion when approaching bottom dead center does not exceed a given limiting value. This limiting value is preferably uniformly determined for all presses of a series.

Matching of different stroke speeds is possible through varying gear systems which have uniform connecting dimensions within the press production series. They are preferably realized as planetary gears with uniform connecting dimensions. The planetary gears can be driven by the electric motor via a belt drive or another type of drive which is uniform within the press production series. The uniform connecting dimensions allow the use of uniform press bodies, press heads and similar items.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects, advantages and novel features of the present invention will become apparent from the following detailed

description of the invention when considered in conjunction with the accompanying drawings.

Figure 1 is a perspective detail view of a toggle press in accordance with the present invention;

Figure 2 is a perspective detail view of a drive of a toggle press as shown in Figure 1;

Figure 3 is a schematic view of a drive and a gear system for a press of a press production series; and

Figure 4 is a schematic view of a drive and a gear system of another press of the same press production series.

DETAILED DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates a modified toggle press 1 which is used, for example, for massive forming. A ram 3 is journalled vertically movable in a machine frame 2. A ram guide 4, realized as a linear guide, serves to guide in the machine frame 2. A table 5 is arranged below the ram 3 which is journalled on the machine frame 2 or realized from same, and the table accepts a lower tool. The ram 3 is disposed to accept an upper tool, all in a generally known manner.

A ram drive 6 which includes a modified toggle drive 7 driven by an eccentric shaft 8 serves to drive the ram 3. The shaft 8 is driven via a driving agent, e.g., a cogwheel 9, by an electric motor 11 (see Figure 2). A flange-mounted offset drive 12, preferably in the form of a planetary gear system, can be positioned between the electric motor 11 and the cogwheel 9 next to the flywheel. Its ring gear 14 is, for example, driven by the electric motor 11 via a belt 15. Its sun gear is supported via a shaft 16, preferably so that it rotates with the shaft, while its planet carrier drives a pinion 18 meshing with the cogwheel 9 via a driven shaft 17. By using equal external dimensions, particularly equal ring gears 14 and other connecting dimensions, the desired varying transmission ratios for different stroke speeds can be attained by replacing the sun gear and planet gears.

An eccentric 21 is seated on the rotatable journaled eccentric shaft 8 so that it rotates with the shaft. A connecting rod 22 with a corresponding connecting rod bearing 23 is run on bearings on the eccentric 8. The connecting rod 22 has a head 24 on the end lying away from the eccentric 21 on which two bearings 25, 26 are realized positioned separated from one another. The bearings 25, 26 define a triangle with the center of the connecting rod bearing 23.

The bearings 25, 26 are formed by bores in the corresponding attachment regions 25a, 26a of the connecting rod 22. The

connecting regions 25a, 26a are, as can be seen in Figure 1, predetermined recesses between two plate shaped walls 25b, 25c; 26b, 26c which are dimensioned relatively large in order to be able to provide bores for bearings within a relatively large region.

5 The connecting rod 22 is connected with the machine body 2 and the ram 3 via links 31, 32. The link 31 extends into the upper opening formed between the walls 25b, 25c of the connecting rod 21, and is rotatably journalled here by a pivot pin 33. It is journalled with the machine frame 2 with a pivot pin 34 on its
10 opposite upper end.

15 The first press embodiment with the gear system according to Figure 3 has a lower stroke speed and a greater nominal force than the second press embodiment with the gear system according to Figure 4. The gear systems only differentiate themselves in regard to the planet gears 17a, 17b, 17c, the planet bearer 17, and the sun gear 16. All of the assembly points and external dimensions of the predetermined elements of the gear system, such as, for example, the toothed belt 15, the electric motor 11, and the ring gear 14, as well as the rotational axes of the sun gear 16 and the
20 output of the electric motor 11, correspond to each other in both embodiments. Therefore, the stroke speed within the press production series can be adjusted to concrete requirements merely by modification of the planet gears 17a, 17b, 17c (and the planet bearer 17), as well as the sun gear 16.

For a press production series 1 for massive forming with toggle drives 7 to drive the ram 3, varying stroke speeds of the ram movement are attained by adjustment of cogwheels of a planetary gear system whose connecting dimensions are unchangeably fixed. In this respect, uniform machine frames 2 can therefore be used.

The foregoing disclosure has been set forth merely to illustrate the invention and is not intended to be limiting. Since modifications of the disclosed embodiments incorporating the spirit and substance of the invention may occur to persons skilled in the art, the invention should be construed to include everything within the scope of the appended claims and equivalents thereof.

IN THE CLAIMS:

1. A press of a press production series used for massive forming, comprising

a machine frame;

a ram guided in a journalled manner and arranged for attachment of a first tool component;

a ram drive positioned on the machine frame and presetting a path-time trace of the ram drive and comprising at least one electric motor and at least one eccentric shaft connected to one another via a drive; and

a table positioned opposite to the ram on the machine body and arranged for attachment of a second tool component, wherein the drive has an offset drive specific to various presses of the press production series for realization of different stroke speeds.

2. The press according to claim 1, wherein the offset drive comprises a planetary gear system.

3. The press according to claim 2, wherein the connections and dimensions of the planetary gear system are uniform within the production series and are attachable to uniform press bodies.

4. The press according to claim 2, wherein a belt drive is positioned between the planetary gear system and the electric motor.

5. A press production series with presses comprising
a machine frame;

a ram guided in a journalled manner and disposed for
attachment of a first tool component;

a ram drive positioned on the machine frame and presets a
path-time trace of the ram and comprises at least one electric
motor and at least one eccentric shaft connected to one another via
a drive; and

a table positioned opposite to the ram on the machine body and
is disposed for attachment of a second tool component, wherein the
drive has an offset drive specific to the various presses of the
press production series for realization of different stroke speeds
in which the presses vary only in the configuration of the ram
drive.

Isotope	Abundance (%)	Mass (amu)	Relative Abundance (%)
^{12}C	98.93	12.0000	100.00
^{13}C	1.07	13.0034	1.07
^{14}C	Trace	14.0032	Trace
^{15}N	0.37	15.0031	0.37
^{16}O	99.76	15.9949	100.00
^{17}O	0.04	16.9991	0.04
^{18}O	0.20	17.9992	0.20
^{29}Si	4.70	28.9765	4.70
^{30}Si	9.22	29.9738	9.22
^{31}Si	93.88	30.9751	93.88
^{32}S	95.02	31.9721	100.00
^{33}S	0.76	32.9714	0.76
^{34}S	4.22	33.9704	4.22
^{36}S	0.02	35.9671	0.02
^{37}Cl	24.23	36.9659	24.23
^{35}Cl	75.77	34.9689	100.00
^{40}Ar	99.60	39.9624	100.00
^{39}Ar	0.001	38.9640	0.001
^{41}Ar	0.003	40.9645	0.003
^{42}Ca	0.04	41.9586	0.04
^{43}Ca	0.14	42.9597	0.14
^{44}Ca	2.06	43.9594	2.06
^{46}Ca	0.004	45.9526	0.004
^{48}Ca	0.19	47.9471	0.19
^{40}K	0.0117	39.9640	0.0117
^{41}K	6.7301	40.9618	6.7301
^{42}K	0.0001	41.9616	0.0001
^{43}K	11.4903	42.9616	11.4903
^{44}K	0.0001	43.9616	0.0001
^{46}K	0.0001	45.9616	0.0001
^{47}K	0.0001	46.9616	0.0001
^{48}K	0.0001	47.9616	0.0001
^{49}K	0.0001	48.9616	0.0001
^{50}K	0.0001	49.9616	0.0001
^{51}K	0.0001	50.9616	0.0001
^{52}K	0.0001	51.9616	0.0001
^{53}K	0.0001	52.9616	0.0001
^{54}K	0.0001	53.9616	0.0001
^{56}K	0.0001	55.9616	0.0001
^{57}K	0.0001	56.9616	0.0001
^{58}K	0.0001	57.9616	0.0001
^{59}K	0.0001	58.9616	0.0001
^{60}K	0.0001	59.9616	0.0001
^{61}K	0.0001	60.9616	0.0001
^{62}K	0.0001	61.9616	0.0001
^{63}K	0.0001	62.9616	0.0001
^{64}K	0.0001	63.9616	0.0001
^{65}K	0.0001	64.9616	0.0001
^{66}K	0.0001	65.9616	0.0001
^{67}K	0.0001	66.9616	0.0001
^{68}K	0.0001	67.9616	0.0001
^{69}K	0.0001	68.9616	0.0001
^{70}K	0.0001	69.9616	0.0001
^{71}K	0.0001	70.9616	0.0001
^{72}K	0.0001	71.9616	0.0001
^{73}K	0.0001	72.9616	0.0001
^{74}K	0.0001	73.9616	0.0001
^{75}K	0.0001	74.9616	0.0001
^{76}K	0.0001	75.9616	0.0001
^{77}K	0.0001	76.9616	0.0001
^{78}K	0.0001	77.9616	0.0001
^{79}K	0.0001	78.9616	0.0001
^{80}K	0.0001	79.9616	0.0001
^{81}K	0.0001	80.9616	0.0001
^{82}K	0.0001	81.9616	0.0001
^{83}K	0.0001	82.9616	0.0001
^{84}K	0.0001	83.9616	0.0001
^{85}K	0.0		

Isotope	Abundance (%)	Mass (amu)	Relative Abundance (%)
^{12}C	98.93	12.0000	100.00
^{13}C	1.07	13.0034	1.07
^{14}C	Trace	14.0032	Trace
^{15}N	0.37	15.0031	0.37
^{16}O	99.76	15.9949	100.00
^{17}O	0.04	16.9991	0.04
^{18}O	0.20	17.9992	0.20
^{29}Si	4.70	28.9765	4.70
^{30}Si	9.22	29.9738	9.22
^{31}Si	93.88	30.9751	93.88
^{32}S	95.02	31.9721	100.00
^{33}S	0.76	32.9714	0.76
^{34}S	4.22	33.9704	4.22
^{36}S	0.02	35.9671	0.02
^{37}Cl	24.23	36.9659	24.23
^{35}Cl	75.77	34.9689	100.00
^{40}Ar	99.60	39.9624	100.00
^{39}Ar	0.001	38.9640	0.001
^{41}Ar	0.003	40.9645	0.003
^{42}Ca	0.04	41.9586	0.04
^{43}Ca	0.14	42.9597	0.14
^{44}Ca	2.06	43.9594	2.06
^{46}Ca	0.004	45.9526	0.004
^{48}Ca	0.19	47.9471	0.19
^{40}K	0.0117	39.9640	0.0117
^{41}K	6.7301	40.9618	6.7301
^{42}K	0.0001	41.9616	0.0001
^{43}K	11.4903	42.9616	11.4903
^{44}K	0.0001	43.9616	0.0001
^{46}K	0.0001	45.9616	0.0001
^{47}K	0.0001	46.9616	0.0001
^{48}K	0.0001	47.9616	0.0001
^{49}K	0.0001	48.9616	0.0001
^{50}K	0.0001	49.9616	0.0001
^{51}K	0.0001	50.9616	0.0001
^{52}K	0.0001	51.9616	0.0001
^{53}K	0.0001	52.9616	0.0001
^{54}K	0.0001	53.9616	0.0001
^{56}K	0.0001	55.9616	0.0001
^{57}K	0.0001	56.9616	0.0001
^{58}K	0.0001	57.9616	0.0001
^{59}K	0.0001	58.9616	0.0001
^{60}K	0.0001	59.9616	0.0001
^{61}K	0.0001	60.9616	0.0001
^{62}K	0.0001	61.9616	0.0001
^{63}K	0.0001	62.9616	0.0001
^{64}K	0.0001	63.9616	0.0001
^{65}K	0.0001	64.9616	0.0001
^{66}K	0.0001	65.9616	0.0001
^{67}K	0.0001	66.9616	0.0001
^{68}K	0.0001	67.9616	0.0001
^{69}K	0.0001	68.9616	0.0001
^{70}K	0.0001	69.9616	0.0001
^{71}K	0.0001	70.9616	0.0001
^{72}K	0.0001	71.9616	0.0001
^{73}K	0.0001	72.9616	0.0001
^{74}K	0.0001	73.9616	0.0001
^{75}K	0.0001	74.9616	0.0001
^{76}K	0.0001	75.9616	0.0001
^{77}K	0.0001	76.9616	0.0001
^{78}K	0.0001	77.9616	0.0001
^{79}K	0.0001	78.9616	0.0001
^{80}K	0.0001	79.9616	0.0001
^{81}K	0.0001	80.9616	0.0001
^{82}K	0.0001	81.9616	0.0001
^{83}K	0.0001	82.9616	0.0001
^{84}K	0.0001	83.9616	0.0001
^{85}K	0.0		



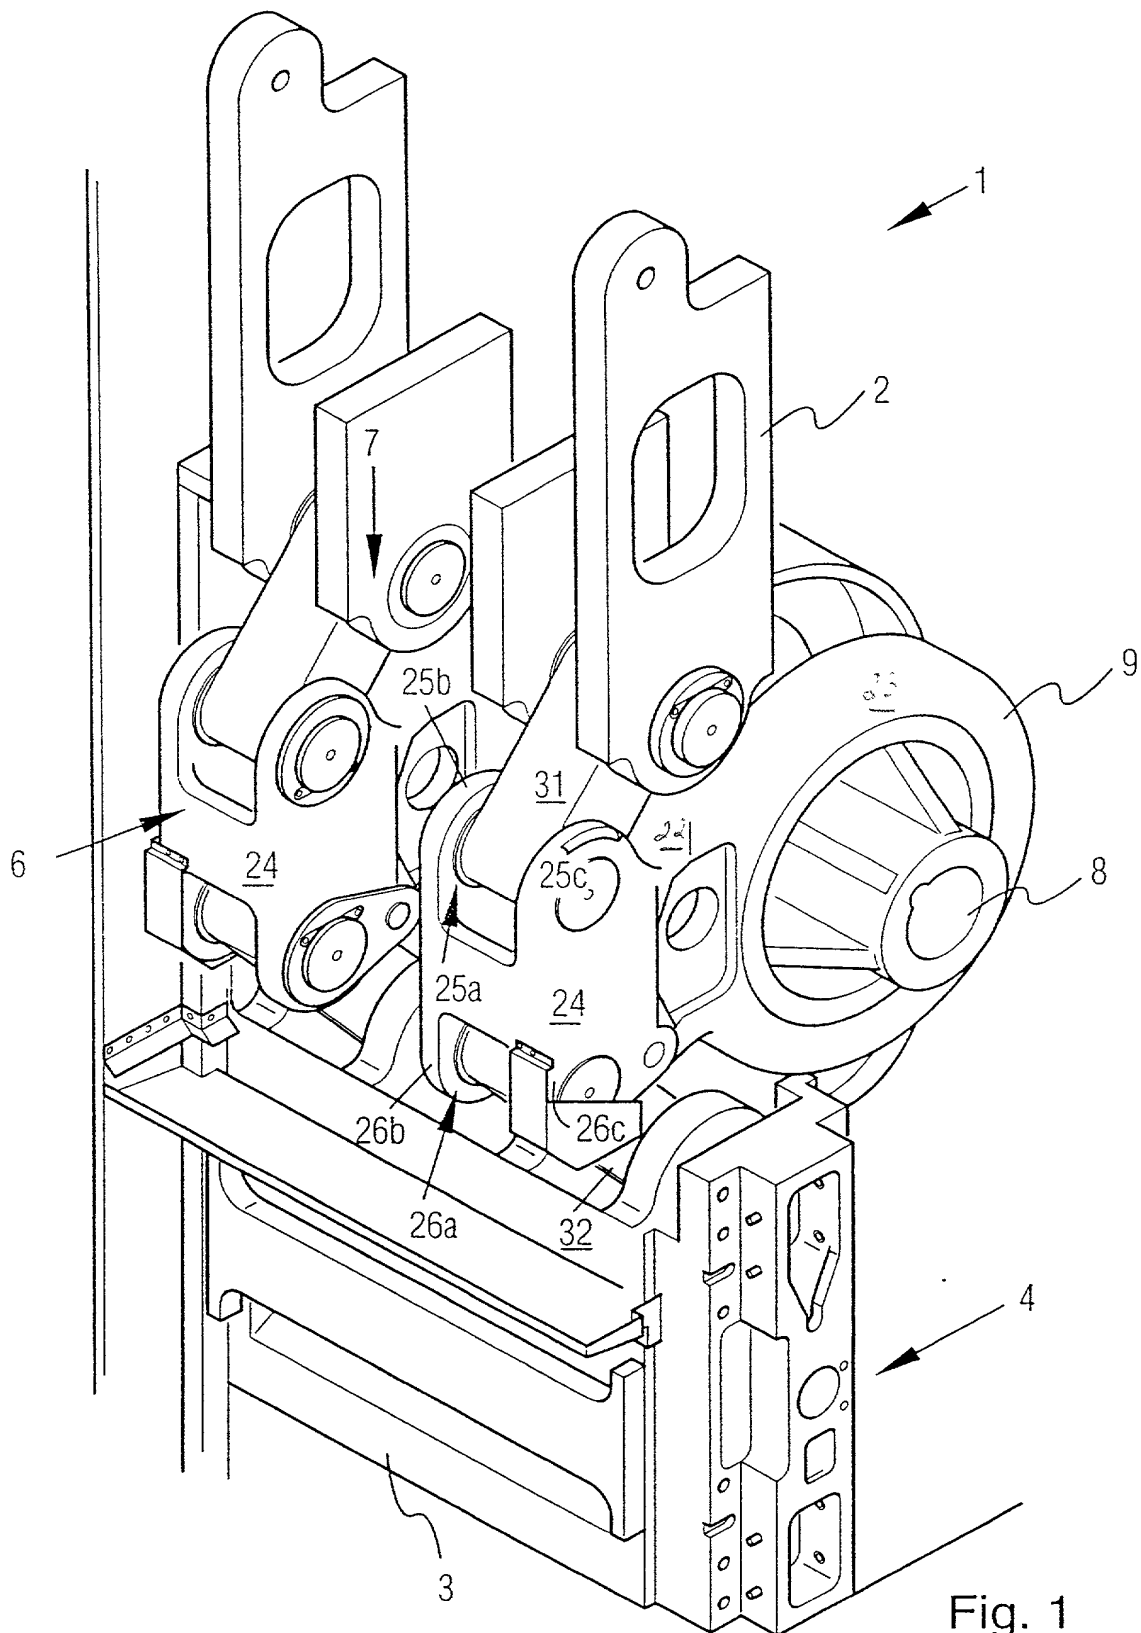


Fig. 1

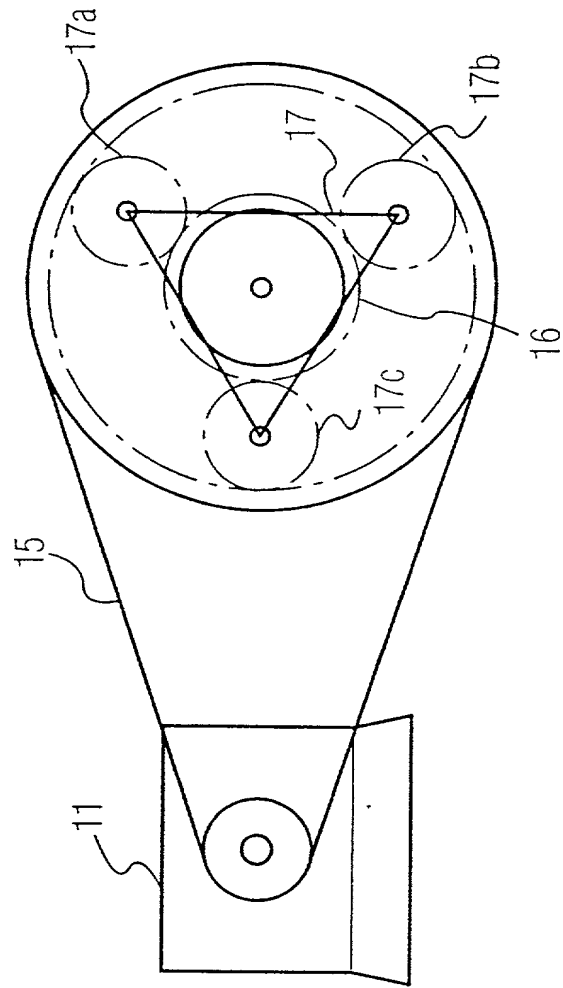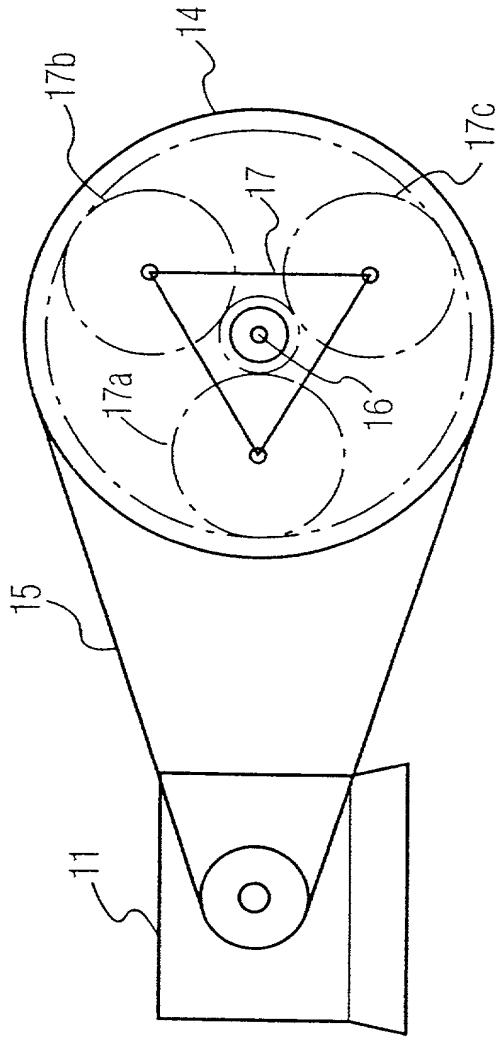

DECLARATION AND POWER OF ATTORNEY - PATENT APPLICATION

As a below named inventor, I hereby declare that my citizenship, postal address and residence are as stated below; that I verily believe I am the original, first and sole inventor (if only one inventor is named below) or a joint inventor (if plural inventors are named below) of the invention entitled:

PRESS PRODUCTION SERIES WITH OFFSET DRIVE

the specification of which

X is attached hereto, or
_____ was filed on _____ as Application Serial No. _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose all information known to be material to patentability as defined in 37 CFR §1.56. I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)	Priority Claimed
<u>199 35 655.6</u> (Number)	<u>Germany</u> (Country)
<u>29 July 1999</u> (Day/Month/Year)	<u>Yes</u>
<u> </u> (Number)	<u> </u> (Country)
<u> </u> (Day/Month/Year)	<u> </u>
<u> </u> (Number)	<u> </u> (Country)
<u> </u> (Day/Month/Year)	<u> </u>

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose all information known to be material to patentability as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status)
--------------------------	---------------	----------

I hereby appoint as principal attorneys Martin Fleit, Reg. No. 16,900; Herbert I. Cantor, Reg. No. 24,392; James F. McKeown, Reg. No. 25,406; Donald D. Evenson, Reg. No. 26,160; Joseph D. Evans, Reg. No. 26,269; Gary R. Edwards, Reg. No. 31,824; and Jeffrey D. Sanok, Reg. No. 32,169; Richard R. Diefendorf, Reg. No. 32,390; and Paul A. Schnose, Reg. No. 39,361, to prosecute and transact all business in the Patent and Trademark Office connected with this application and any related United States and international applications. Please direct all communications to:

Evenson, McKeown, Edwards & Lenahan, P.L.L.C.
1200 G Street, N.W., Suite 700
Washington, D.C. 20005
Telephone: (202) 628-8800
Facsimile: (202) 628-8844

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

INVENTOR:	Ekkehard KÖRNER
Citizenship:	German
Residence/	David Späth Weg 32
Post Office Address:	D-73035 Göppingen
	GERMANY

(Date)

(Signature of 1st Inventor)

INVENTOR:	Rainer GÜTHLE
Citizenship:	German
Residence/	Kronengässle 1/1
Post Office Address:	D-73061 Ebersbach/Weiler
	GERMANY

(Date)

(Signature of 2nd Inventor)